

## DOC M Bathroom



## Sanitary Accomodation | DOC M Bathroom

The HEWI System 900 is the perfect solution for stylish and compliant accessible bathrooms. Our contemporary designs combine innovative functionality with intuitive installation technology, allowing our clients to create aspirational accessible spaces.

With fixed and removable solutions available, System 900 is a step away from the accessible bathrooms of the past. At HEWI we believe that the future should incorporate spaces that are designed to be all inclusive, comfortable, and desirable no matter how you may need to move around a room.

System 900 fulfils the requirements of all building types and user groups – whether it's a Hotel, Public Building or Hospital & Care Facility, HEWI have a solution to compliment the design and function required.

# Content

## Sanitary Accommodation

### Product selection System 900

DOC M Pack WC	HEWI DOC M WC 900 XA   stainless steel	8
	HEWI DOC M WC 900 CH   chrome	9
	HEWI DOC M WC 900 MW   matt white	10
	HEWI DOC M WC 900 MA   matt dark grey pearl mica	11
	HEWI DOC M WC 900 MB   matt black	12

### Product selection System 900

DOC M Pack Shower	HEWI DOC M SH 900 XA   stainless steel	14
	HEWI DOC M SH 900 CH   chrome	15
	HEWI DOC M SH 900 MW   matt white	16
	HEWI DOC M SH 900 MA   matt dark grey pearl mica	17
	HEWI DOC M SH 900 MB   matt black	18

Accessories	20
-------------	----



Dispenser products	22
--------------------	----

Contact	24
---------	----

# HEWI DOC M WC Pack



please see product and finish selection on pages 8 - 13

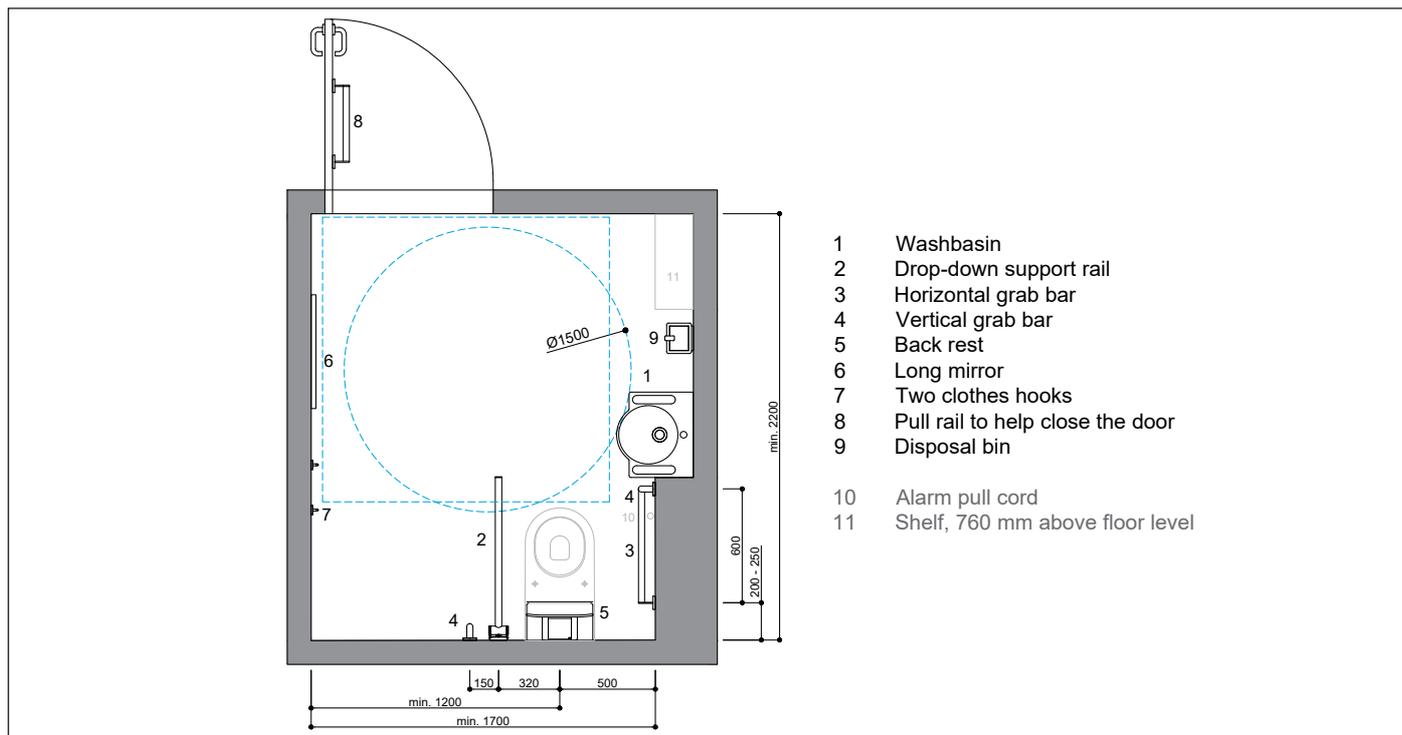
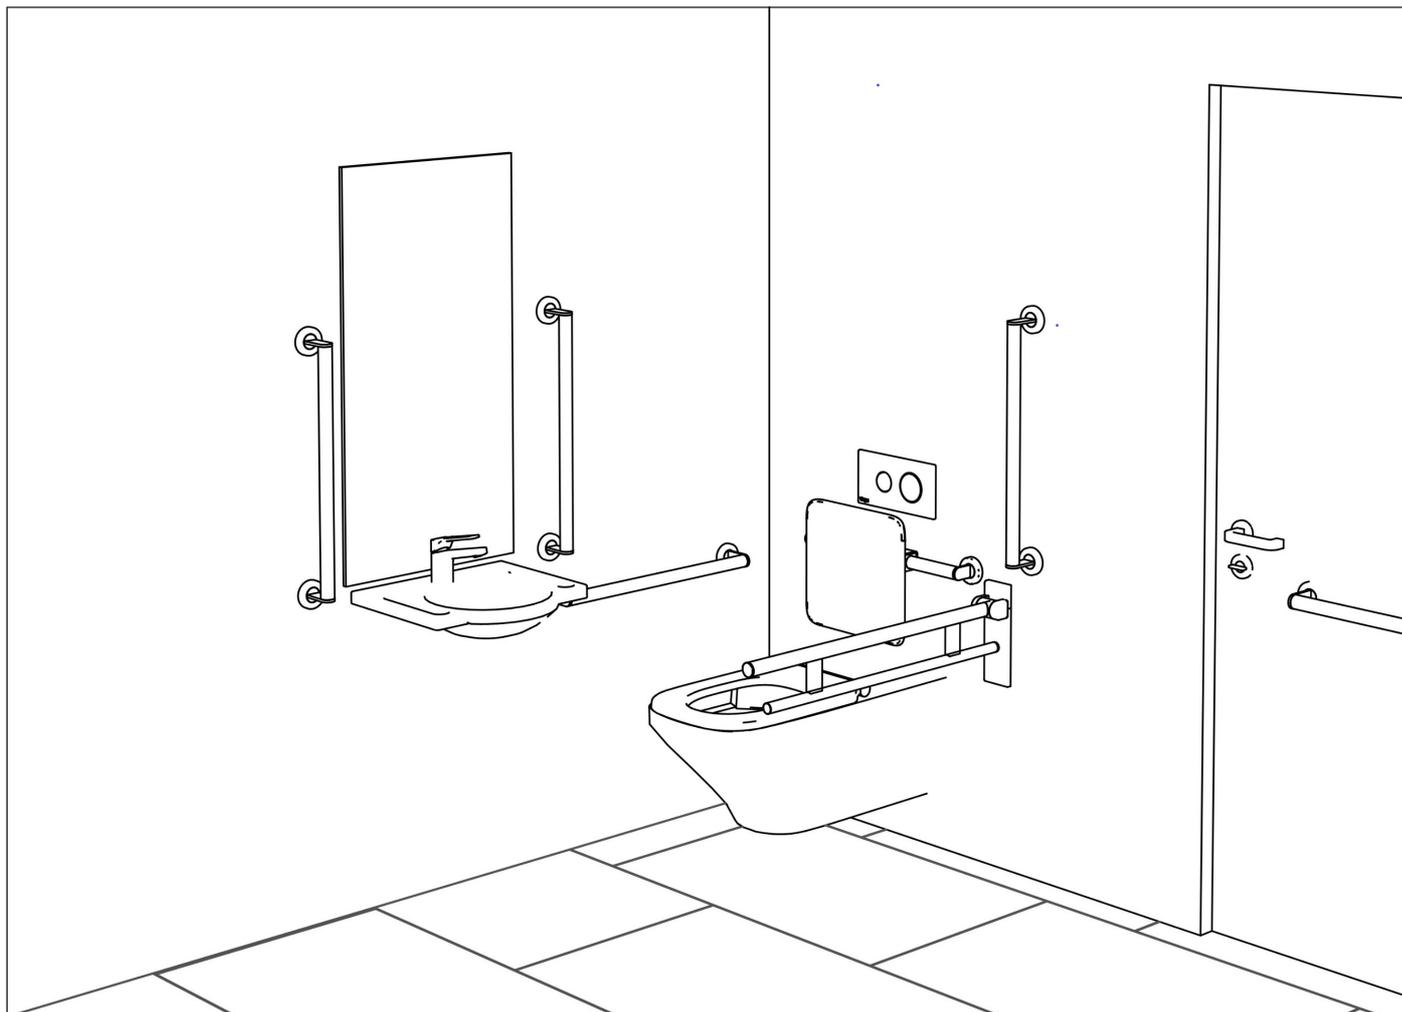


Please contact us for more information [info@hewi.co.uk](mailto:info@hewi.co.uk).

## HEWI DOC M Shower Pack



please see product and finish selection on pages 14 - 19

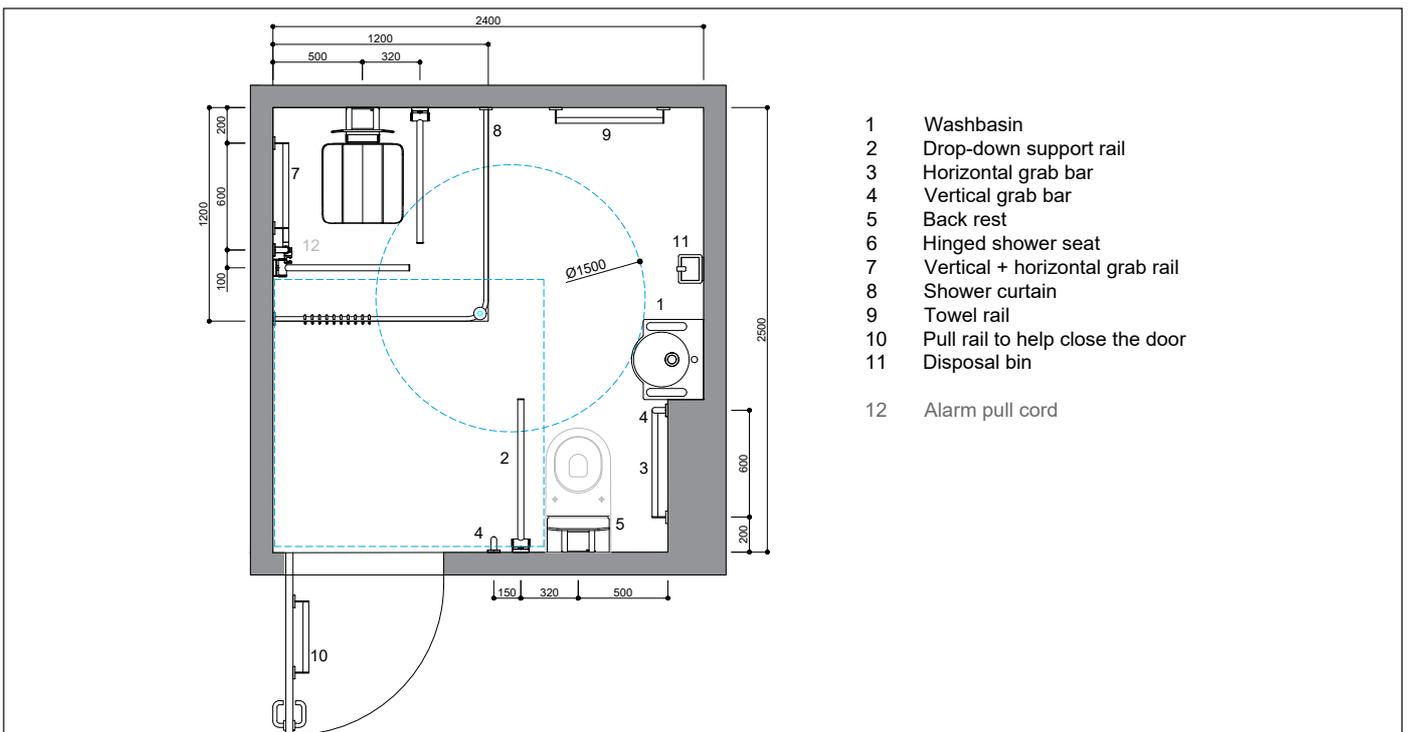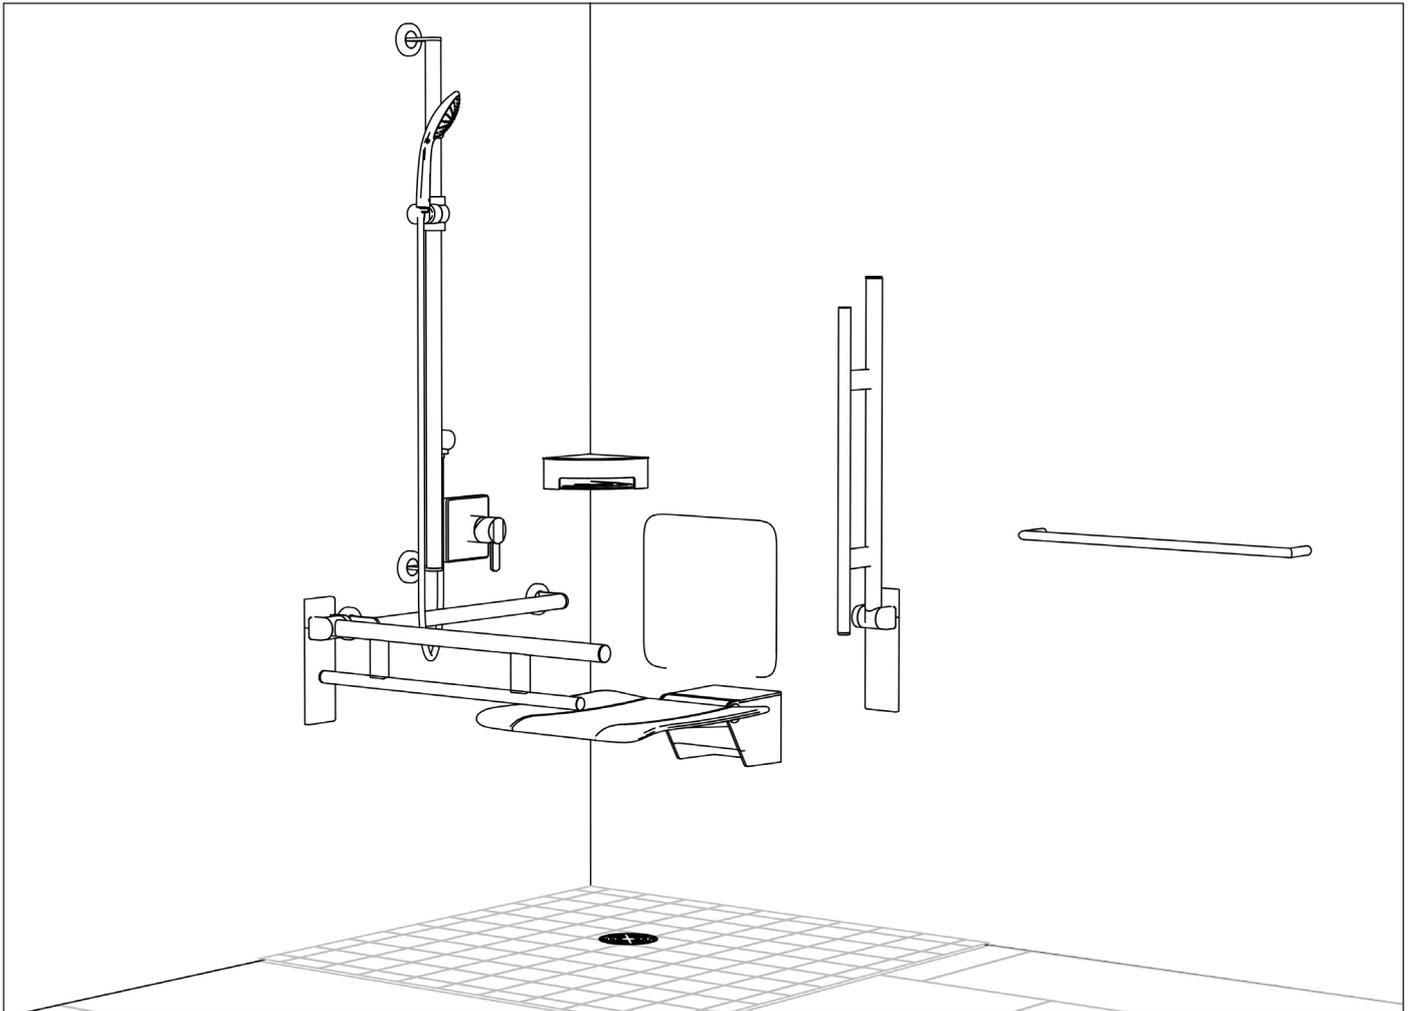

Please contact us for more information [info@hewi.co.uk](mailto:info@hewi.co.uk).

# HEWI DOC M WC 900 XA | stainless steel

## Product selection



x1

### Washbasin | 950.11.501

- made of mineral composite with non-porous surface, alpine white
- integrated gripping feature on the side, can be used as a towel holder
- without overflow
- prepared for single hole mixer tap
- wheelchair accessible
- 450 mm wide and 400 mm deep
- for hanger bolt fixing



x5

### Support rail c to c 600 mm satin | 900.36.003XA


- straight rail with supports straight to the wall and roses
- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of stainless steel, satin



x1

### Backrest satin | 900.51.905XA 98


- backrest with fixing rails with roses on both sides
- for wall mounting
- 330 mm high and 150 mm deep, backrest 350 mm wide, rail diameter 32 mm, tube thickness 2 mm
- centre-to-centre from 478 to 578 mm, adjustable on site
- backrest made of synthetic material in the HEWI colour 98 (signal white)
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M

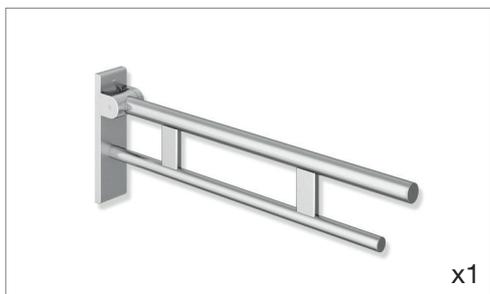

x1

### Hinged support rail Duo 850 mm projection satin | 900.50.161XA

- projection 850 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of stainless steel, satin
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)

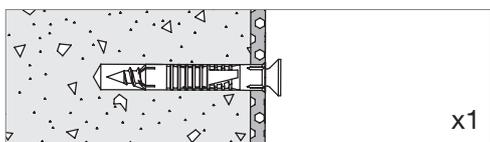


x1

### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14 x 70 mm

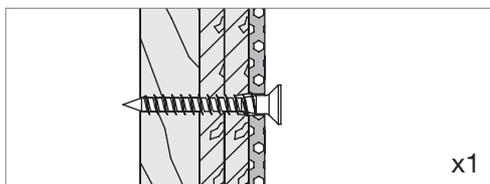

x1

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

# HEWI DOC M WC 900 CH | chrome

## Product selection



x1

### Washbasin | 950.11.501

- made of mineral composite with non-porous surface, alpine white
- integrated gripping feature on the side, can be used as a towel holder
- without overflow
- prepared for single hole mixer tap
- wheelchair accessible
- 450 mm wide and 400 mm deep
- for hanger bolt fixing



x5

### Support rail c to c 600 mm chrome | 900.36.00340

- straight rail with supports straight to the wall and roses
- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of stainless steel, chrome



x1

### Backrest chrome | 900.51.90540 98


- backrest with fixing rails with roses on both sides
- 330 mm high and 150 mm deep, backrest 350 mm wide, rail diameter 32 mm, tube thickness 2 mm
- centre-to-centre from 478 to 578 mm, adjustable on site
- backrest made of synthetic material in HEWI colours 98 (signal white)
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M



x1

### Hinged support rail Duo 850 mm projection chrome | 900.50.16140

- projection 850 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of stainless steel, satin
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)

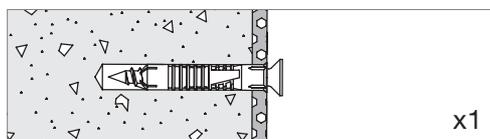


x1

### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14 x 70 mm

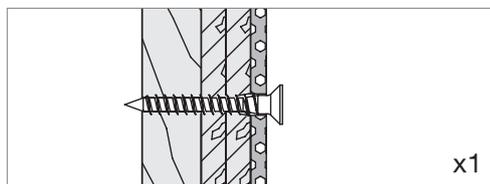

x1

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

Please contact us for more information [info@hewi.co.uk](mailto:info@hewi.co.uk).

# HEWI DOC M WC 900 MW | matt white

## Product selection



x1

### Washbasin | 950.11.501

- made of mineral composite with non-porous surface, alpine white
- integrated gripping feature on the side, can be used as a towel holder
- without overflow
- prepared for single hole mixer tap
- wheelchair accessible
- 450 mm wide and 400 mm deep
- for hanger bolt fixing



x5

### Support rail 600 mm powder-coated | 900.36.00360 DX

- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour DX (matt white)



x1

### Backrest powder-coated | 900.51.90560 AS


- backrest with fixing rails with roses on both sides
- for wall mounting
- 330 mm high and 150 mm deep, backrest 350 mm wide, rail diameter 32 mm, tube thickness 2 mm
- centre-to-centre from 478 to 578 mm, adjustable on site
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M



x1

### Hinged support rail Duo 850 mm powder-coated | 900.50.16160 DX

- projection 850 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of high-quality stainless steel, powder-coated in the HEWI colour DX (matt white)
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)




x1

### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14 x 70 mm

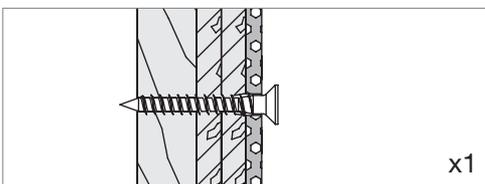

x1

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

# HEWI DOC M WC 900 MA | matt dark grey pearl mica

## Product selection



x1

### Washbasin | 950.11.501

- made of mineral composite with non-porous surface, alpine white
- integrated gripping feature on the side, can be used as a towel holder
- without overflow
- prepared for single hole mixer tap
- wheelchair accessible
- 450 mm wide and 400 mm deep
- for hanger bolt fixing



x5

### Support rail 600 mm powder-coated | 900.36.00360 SC

- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour SC (matt dark grey pearl mica)



x1

### Backrest powder-coated | 900.51.90560 ER


- backrest with fixing rails with roses on both sides
- for wall mounting
- 330 mm high and 150 mm deep, backrest 350 mm wide, rail diameter 32 mm, tube thickness 2 mm
- centre-to-centre from 478 to 578 mm, adjustable on site
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M



x1

### Hinged support rail Duo 850 mm projection powder-coated | 900.50.16160 SC

- projection 850 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of high-quality stainless steel, powder-coated in the HEWI colour SC (matt dark grey pearl mica)
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)

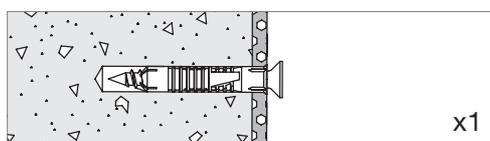


x1

### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14 x 70 mm

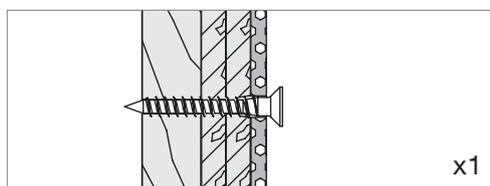

x1

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

# HEWI DOC M WC 900 MB | matt black

## Product selection



x1

### Washbasin | 950.11.501

- made of mineral composite with non-porous surface, alpine white
- integrated gripping feature on the side, can be used as a towel holder
- without overflow
- prepared for single hole mixer tap
- wheelchair accessible
- 450 mm wide and 400 mm deep
- for hanger bolt fixing



x5

### Support rail c to c 600 mm powder-coated | 900.36.00360 DC

- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour DC (matt black)



x1

### Backrest powder-coated | 900.51.90560 CV


- backrest with fixing rails with roses on both sides
- for wall mounting
- 330 mm high and 150 mm deep, backrest 350 mm wide, rail diameter 32 mm, tube thickness 2 mm
- centre-to-centre from 478 to 578 mm, adjustable on site
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M



x1

### Hinged support rail Duo 850 mm projection powder-coated | 900.50.16160 DC

- projection 850 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of stainless steel, powder-coated in the HEWI colour DC (matt black)
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)




x1

### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14 x 70 mm

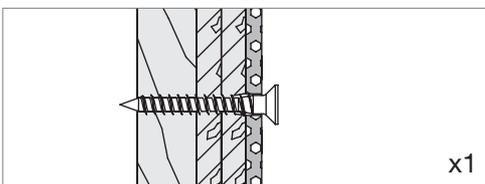

x1

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

Please contact us for more information [info@hewi.co.uk](mailto:info@hewi.co.uk).



# HEWI DOC M SH 900 XA | stainless steel

## Product selection



### Support rail c to c 600 mm satin | 900.36.003XA

- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of stainless steel, satin




### Rail with shower head holder | 900.33.002XA 98

- vertical rail with supports perpendicular to the wall, mounting and shower head holder
- fixing spacing 1100 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of stainless steel, satin
- shower head holder made of high-quality matt polyamide in the HEWI colours 98 (signal white)




### Hinged seat with back rest | 900.51.203XA 98

- hinged seat with slip-resistant, textured seat made of synthetic material in the HEWI colour 98 (signal white)
- wall bracket made of stainless steel, satin
- backrest with structured backrest made of synthetic material in the HEWI colour 98 (signal white)
- weight capacity up to 150 kg
- 450 mm wide, 650 mm deep and 532 mm high
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M

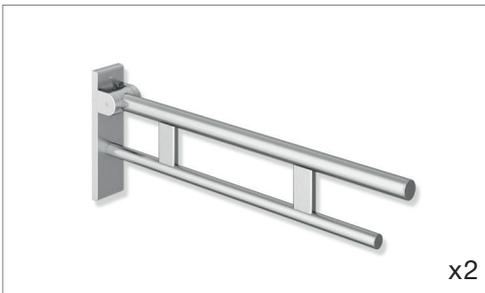

### Hinged support rail Duo 750 mm projection | 900.50.160XA

- can be folded upwards and folded downwards with braked movement
- projection 750 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of stainless steel, satin
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)

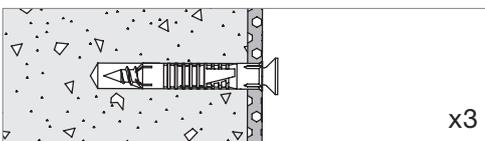


### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

for hinged support rail + hinged seat

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14x70 mm

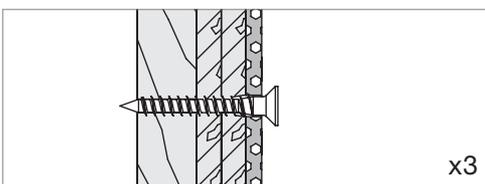

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

# HEWI DOC M SH 900 CH | chrome

## Product selection



### Support rail c to c 600 mm chrome | 900.36.00340

- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of stainless steel, chrome




### Rail with shower head holder | 900.33.00240 98

- vertical rail with supports perpendicular to the wall, mounting and shower head holder
- fixing spacing 1100 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of stainless steel, chrome
- shower head holder made of high-quality matt polyamide in the HEWI colour 98 (signal white)




### Hinged seat with back rest | 900.51.20340 98

- hinged seat with slip-resistant, textured seat made of synthetic material in the HEWI colour 98 (signal white)
- wall bracket made of stainless steel, chrome
- backrest with structured backrest made of synthetic material in the HEWI colour 98 (signal white)
- weight capacity up to 150 kg
- 450 mm wide, 650 mm deep and 532 mm high
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M

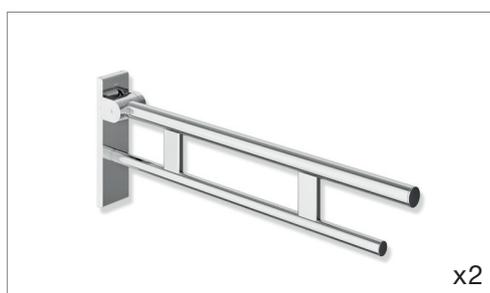

### Hinged support rail Duo 750 mm projection | 900.50.16040

- can be folded upwards and folded downwards with braked movement
- projection 750 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of stainless steel, chrome
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)

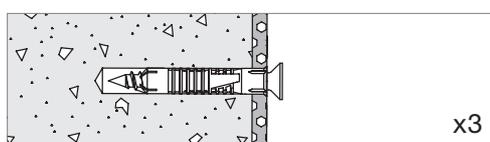


### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

for hinged support rail + hinged seat

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14x70 mm

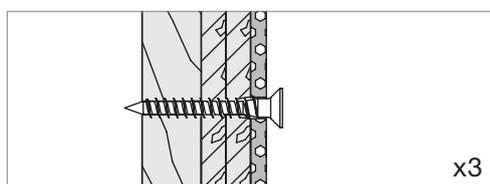

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

Please contact us for more information [info@hewi.co.uk](mailto:info@hewi.co.uk).

# HEWI DOC M SH 900 MW | matt white

## Product selection



### Support rail 600 mm powder-coated | 900.36.00360 DX

- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour DX (matt white)



### Rail with shower head holder | 900.33.00260 AS

- vertical rail with supports perpendicular to the wall, mounting and shower head holder
- fixing spacing 1100 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour AS (matt white)




### Hinged seat with back rest | 900.51.20360 AS

- hinged seat with slip-resistant, textured seat made of synthetic material in the HEWI colour 98 (signal white)
- wall bracket made of high-quality stainless steel, powder-coated in the HEWI colour AS (matt white)
- backrest with structured backrest made of synthetic material in the HEWI colour 98 (signal white)
- weight capacity up to 150 kg
- 450 mm wide, 650 mm deep and 532 mm high
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M



### Hinged support rail Duo 750 mm projection | 900.50.16060 DX

- can be folded upwards and folded downwards with braked movement
- projection 750 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of high-quality stainless steel, powder-coated in the HEWI colour DX (matt white)
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)

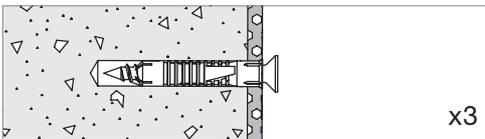


### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

for hinged support rail + hinged seat

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14x70 mm

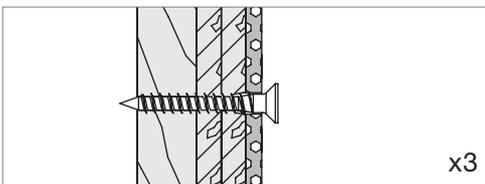

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

# HEWI DOC M SH 900 MA | matt dark grey pearl mica

## Product selection



### Support rail 600 mm powder-coated | 900.36.00360 SC

- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour SC (matt dark grey pearl mica)




### Rail with shower head holder | 900.33.00260 ER

- vertical rail with supports perpendicular to the wall, mounting and shower head holder
- fixing spacing 1100 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour ER (matt dark grey pearl mica) with a showerhead holder in matt black polyamide




### Hinged seat with back rest | 900.51.20360 ER

- hinged seat with slip-resistant, textured seat made of synthetic material in HEWI colour 90 (jet black)
- wall bracket made of high-quality stainless steel, powder-coated in the HEWI colour ER (matt dark grey pearl mica) with a black seat
- backrest with structured backrest made of synthetic material in HEWI colour 90 (jet black)
- weight capacity up to 150 kg
- 450 mm wide, 650 mm deep and 532 mm high
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M

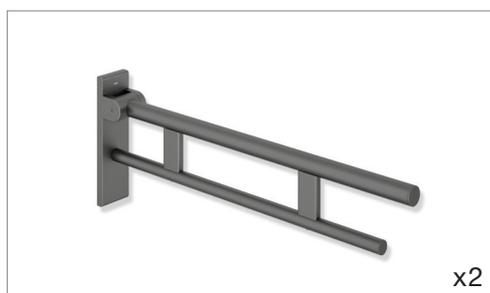

### Hinged support rail Duo 750 mm projection | 900.50.16060 SC

- can be folded upwards and folded downwards with braked movement
- projection 750 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of high-quality stainless steel, powder-coated in the HEWI colour SC (matt dark grey pearl mica)
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)

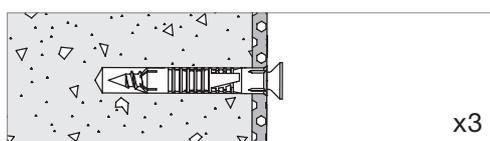


### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

for hinged support rail + hinged seat

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14x70 mm

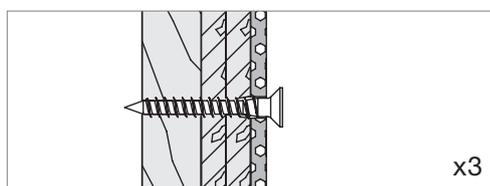

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.

# HEWI DOC M SH 900 MB | matt black

## Product selection



### Support rail c to c 600 mm powder-coated | 900.36.00360 DC

- fixing spacing 600 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour DC (matt black)



### Rail with shower head holder | 900.33.00260 CV

- vertical rail with supports perpendicular to the wall, mounting and shower head holder
- fixing spacing 1100 mm, 88 mm deep
- rail diameter 32 mm, tube thickness 2 mm, rose diameter 70 mm
- made of high-quality stainless steel, powder-coated in the HEWI colour CV (matt black) with a showerhead holder in matt black polyamide
- suitable for shower heads of various manufacturers




### Hinged seat with back rest | 900.51.20360 CV

- hinged seat with slip-resistant, textured seat made of synthetic material in the HEWI colour 90 (jet black)
- wall bracket made of high-quality stainless steel, powder-coated in the HEWI colour CV (matt black) with a black seat
- backrest with structured backrest made of synthetic material in HEWI colour 90 (jet black)
- weight capacity up to 150 kg
- 450 mm wide, 650 mm deep and 532 mm high
- fulfils the requirements to British-Standard BS 8300:2009+A1:2010/Doc M



### Hinged support rail Duo 750 mm projection | 900.50.160DC

- can be folded upwards and folded downwards with braked movement
- projection 750 mm, 256 mm high and 75 mm wide, top rail diameter 33.7 mm, bottom rail diameter 25 mm
- weight capacity up to 100 kg
- made of high-quality stainless steel, powder-coated in the HEWI colour DC (matt black)
- for mounting with non-corrosive and tested HEWI fixing materials for different wall systems (to be ordered separately)

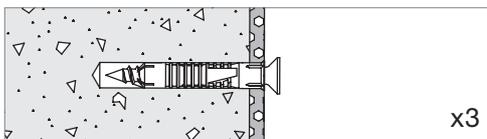


### Fixing material for fixing on walls made of concrete > C20/C25 | BM10.2

for hinged support rail + hinged seat

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm
- 2 wall plugs HILTI HUD 14x70 mm

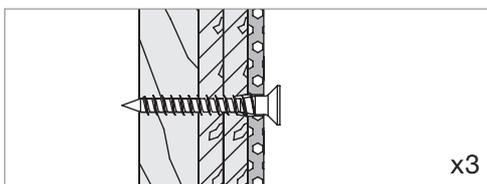

### Fixing material for fixing on walls | BM12.2

For installation on lightweight walls you will need a rear lining, e.g. laminated timber boards, with waterproof bonding, min. 30 mm thickness required, for example, support stand or wall installation)

Consisting of:

- 2 stainless steel screws diameter 10 x 95 mm

All load bearing support products require adequate wall support to ensure they can withstand the forces required of them by law. A standard recommendation would be to reinforce the area holding a support product with 30 – 50 mm of marine ply. This would also be HEWI's recommendation.



## Accessories

### Washbasin | Shower



#### Soap or disinfectant dispenser with holder | 900.06.00060 DC

- holder made of high-quality satin stainless steel, powder-coated in the HEWI colour DC (matt black)
- 180 mm high, 85 mm deep, diameter 70 mm
- soap dispenser made of high-quality, satin-finish crystal glass
- high-quality chrome-plated pump head
- capacity approx. 200 ml



#### Hook | 162.90.01060 DC

- cylindrical hook
- made of metal, powder-coated in the HEWI colour DC (matt black)
- 35 mm long, diameter 15 mm



#### Bath towel rail | 162.30.20060 DC

- bath towel rail made of mitred tube
- made of metal, powder-coated in the HEWI colour DC (matt black)
- centre-to-centre 600 mm, 75 mm deep, diameter 18 mm



#### Shower basket corner solution | 900.03.00260 CV

- for wall mounting
- holder made of high-quality stainless steel powder-coated in the HEWI colour CV (matt black) with insert made of high-quality synthetic material in the HEWI colour 90 (jet black)
- 67 mm high, side length 170 mm

#### The products are available in the following finishes:

##### System 900

##### Colours | Surfaces

- |                                 |  |
|---------------------------------|--|
| <input type="checkbox"/> Chr XA | <input type="checkbox"/> ...60 DX White deep matt                  |
| <input type="checkbox"/>        | <input type="checkbox"/> ...60 SC Dark grey, pearl mica, deep matt |
| <input type="checkbox"/>        | <input type="checkbox"/> ...60 DC Black deep matt                  |

## Accessories

### WC



#### Hygiene waste bin | 900.05.00060 DC

- hygiene waste bin with hinged lid
- the lid can be opened by lightly pressing the knee against the bin
- invisible, integrated bag holder
- only suitable for wall mounting
- capacity approx. 6 l
- 310 mm high, 145 mm deep and 205 mm wide
- made of high-quality stainless steel, powder-coated in the HEWI colour DC (matt black)



#### WC brush set with lid | 900.20.00160 DC

- WC brush set consisting of holder, WC brush pot and WC brush
- replacement of the brush head by bayonet lock
- removable inner container for cleaning
- made of high-quality stainless steel, powder-coated in the HEWI colour DC (black deep matt)
- diameter 89 mm, 440 mm high, 106 mm deep



#### Toilet roll holder | 900.21.00060 DC

- U-shaped holder, open on the right-hand side
- made of high-quality stainless steel, powder-coated in the HEWI colour DC (matt black)
- 135 mm wide, 88 mm high, diameter 15 mm



#### Spare paper holder | 900.21.00660 DC

- cylindrical spare paper holder for holding two toilet paper rolls
- made of high-quality stainless steel, powder-coated in the HEWI colour DC (deep matt black)
- 260 mm long, 51 mm deep, diameter 15 mm

#### The products are available in the following finishes:

##### System 900

##### Colours | Surfaces

- |                                 |  |
|---------------------------------|--|
| <input type="checkbox"/> Chr XA | <input type="checkbox"/> ...60 DX White deep matt                  |
| <input type="checkbox"/>        | <input type="checkbox"/> ...60 SC Dark grey, pearl mica, deep matt |
| <input type="checkbox"/>        | <input type="checkbox"/> ...60 DC Black deep matt                  |

## Dispenser products



### SENSORIC Disinfectant dispenser | 900.06.01660 DC

- For wall mounting
- Made of stainless steel powder-coated in the HEWI colours DX (matt white), DC (matt black), AY (matt light grey pearl mica), and SC (matt dark grey pearl mica)
- Non-contact disinfectant dispensing
- Disinfectant is dispensed as a spray
- Illumination of the disinfection area when the sensor is activated (blue light)
- With inner container for free filling, capacity 500 ml
- Side level indicator



### SENSORIC Disinfectant dispenser | 900.06.01560 DC

- Suitable for counters, countertops and tables, amongst others
- Made of stainless steel powder-coated in the HEWI colours DX (matt white), DC (matt black), AY (matt light grey pearl mica), and SC (matt dark grey pearl mica)
- incl. base plate in dispenser colour
- Non-contact disinfectant dispensing
- Disinfectant is dispensed as a spray
- Illumination of the disinfection area when the sensor is activated (blue light)
- With inner container for free filling, capacity 500 ml
- Side level indicator
- Removable synthetic drip tray and inlay in HEWI colour 90 (jet black)
- 390 mm high, 140 mm deep, 140 mm wide, weight: approx. 4 kg



### SENSORIC Disinfectant dispenser column | 900.06.01460 DC

- Made of stainless steel, powder-coated in the HEWI colours DX (matt white), DC (matt black), AY (matt light grey pearl mica) and SC (matt dark grey pearl mica)
- Non-contact disinfectant dispensing
- Disinfectant is dispensed as a spray
- Illumination of the disinfection area when the sensor is activated (blue light)
- With inner container for free filling, filling quantity 500 ml
- Side level indicator
- Removable synthetic drip tray in HEWI colour 90 (jet black)
- 1390 mm high, 320 mm deep, 320 mm wide, weight: approx. 18 kg

### The products are available in the following finishes:

#### System 900

#### Colours | Surfaces

- |   |   |   |   |
|---|---|---|---|
|  |  |  | ...60 DX White deep matt                  |
|  |   |   | ...60 SC Dark grey, pearl mica, deep matt |
|   |   |   | ...60 DC Black deep matt                  |





[www.hewi.com](http://www.hewi.com)

**GERMANY**

HEWI Heinrich Wilke GmbH  
Postfach 1260  
34442 Bad Arolsen  
Phone: +49 5691 82-0  
Fax: +49 5691 82-319  
[international@hewi.com](mailto:international@hewi.com)

**UNITED KINGDOM**

HEWI (UK) Limited  
Holm Oak Barn, Beluncle Halt  
Stoke Road, Hoo  
Rochester, Kent ME3 9NT  
Phone: +44 1634 258200  
Fax: +44 1634 250099  
[info@hewi.co.uk](mailto:info@hewi.co.uk)