

Get it done:

Application instructions Epoxy Quick Fix




remmers

Digital brochure

You can download this brochure,
and others, in digital form via
this QR code.





Product benefits

- ✓ Quick to reach loading capacity
- ✓ Full hardening even at a substrate temperature of just + 4°C
- ✓ All inclusive, no additional primer costs
- ✓ Saves time – work can continue almost immediately (no separate work step necessary, e.g. for filling hollow coves)
- ✓ Wide range of use, including for hollow coves, sills and missing or broken-out areas
- ✓ Easy to mix thanks to two-chamber bag
- ✓ No mixing errors compared to ready-formulated repair mortars, as the reactive resin is mixed before the filler is added
- ✓ No need for weighing and portioning
- ✓ Packaging can be easily disposed of

What's included

- ✓ Lid tray for preparing the primer
- ✓ Brush for priming
- ✓ Protective gloves
- ✓ 9.0 kg special filler
- ✓ 1.0 kg Epoxy Quick 100
- ✓ Primer + mortar resin

How to use



① ACTIVATE EPOXY QUICK 100

Open the outer packaging at the notch and remove the transparent multi-chamber bag. Remove the separating rod from the bag.



② MIX EPOXY QUICK 100

Mix the contents by brushing evenly with the outside of the hand for approx. 30 seconds right into the corners without leaving streaks.



③ TRANSFER THE MATERIAL

Add a maximum of 20% by mass of the mixed reaction resin mixture to the lid tray. Add the remainder to the entire quantity of the filler.



④ MIX THE COMPONENTS

Use a standard mixing tool to mix the components.



⑤ APPLY THE PRIMER

Prime the bonding surface with the remaining resin from the container.



⑥ APPLY MATERIAL

While the primer is still wet, the mortar is applied, compacted, levelled off and smoothed. The surface can be walked on after just 2 hours.



⑦ EASY DISPOSAL

Once the material has hardened, the packaging can be disposed of as domestic waste.



Watch the instructional video here!

Epoxy Quick Fix


Repair kit for floors and more



Also for incorporating **hollow and triangular coves**



Incorporating sills at openings and doors

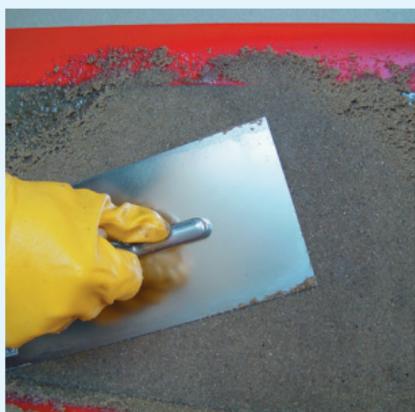

And for **patching up vertical surfaces** thanks to its good stability

**Find out what we
can get done for you:**



Subject to changes. The current version of the applicable Technical Data Sheet is relevant for legal matters.

Colour variations are possible.

Global contact:

www.remmers.com/remmers-worldwide

Remmers GmbH

Bernhard-Remmers-Straße 13

49624 Lönigen

+49 (0) 54 32/83-0