


HELM Tight-sealing sliding door systems

Reliably sealed yet exceptionally smooth-running – for superior comfort and protection



HELM Tight-sealing sliding door systems for interior sliding doors made of timber and glass

- **Sealing performance:** effective four-sided sealing against sound, draughts and odours – ensuring improved acoustics, a comfortable indoor climate and enhanced privacy
- **Installation:** simple fixing to the wall and door leaf surface – no additional door frame or stop casing required
- **Smooth operation:** low opening forces thanks to optimally coordinated magnetic sealing profiles
- **Trolleys:** height-adjustable even after installation, with precision ball bearing for smooth running characteristics and load-bearing pendulum insert or rocker for a long service life
- **Damper and soft-closing device (optional):** the door leaf is gently decelerated during opening and guided in a controlled manner into its end position (when closing, the magnetic sealing system performs this damping function)

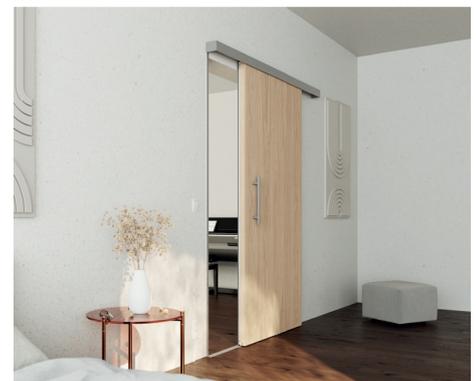

HELM Tight-sealing sliding door systems

Reliably sealed yet exceptionally smooth-running – for superior comfort and protection

Artikel


HELM MK-L 80 H 196 Tight-sealing sliding door system for leaves up to 80 kg, wall installation with 30 mm spacer profile and pelmet



- for interior sliding doors made of timber
- sealing system:
 - effective against sound, draughts and odours
 - sealed to the wall with a magnetic sealing system
 - no door frame or stop casing required
 - can be operated easily due to low opening forces
- trolleys: height-adjustable even after installation, with load-bearing pendulum insert for a long service life

Leaf weight: max. 80 kg
 Leaf thickness: 40 mm
 Leaf width: min. 510 mm (without damper and soft closing device)
 min. 760 mm (with damper and soft closing device on one side)
 max. 2.000 mm

- Set contents:
- 1 x HELM 53/73 track, drilled on the side
 - 2 x HELM spacer profile, 15 mm, drilled
 - 1 x HELM clip-on pelmet, 65 mm, with spacer profile, 9 mm
 - 1 x HELM end cap set
 - 2 x HELM 73 trolley with ball bearing
 - 1 x HELM 73 V flange with support bolt
 - 2 x HELM 65 P door catcher
(when selecting „without damper and soft closing device“)
or
 - 1 x HELM 65 P door catcher,
 - 1 x HELM SmartStop FG 80 damper and soft closing device
(when selecting „damper and soft closing device on one side“)
 - 1 x HELM four-sided sealing system (bottom guide included)

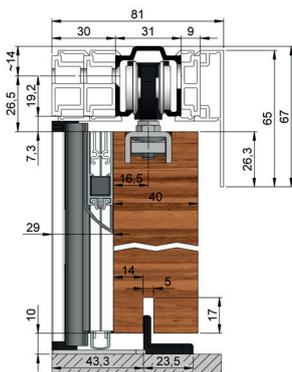

Finish	Number of leaves	Damper and soft closing device	Track length	Article no.
aluminium, silver anodised	1	without	measure length	MK.L80.H.196.41.1.00.9999
		on one side	measure length	MK.L80.H.196.41.1.05.9999
aluminium, stainless steel effect anodised	1	without	measure length	MK.L80.H.196.35.1.00.9999
		on one side	measure length	MK.L80.H.196.35.1.05.9999



Configure product online



Download inquiry form



Download installation instructions

Artikel


HELM GT-L 80 H 496 Tight-sealing sliding door system for leaves up to 80 kg, wall installation with 15 mm spacer profile and pelmet



- for interior sliding doors made of timber
- sealing system:
 - effective against sound, draughts and odours
 - sealed to the wall with a magnetic sealing system
 - no door frame or stop casing required
 - can be operated easily due to low opening forces
- trolleys: height-adjustable even after installation, with load-bearing rocker for a long service life

Leaf weight: max. 80 kg
 Leaf thickness: 40 mm
 Leaf width: min. 625 mm
 max. 2.000 mm

- Set contents:
- 1 x HELM GT-L track for wall installation
 - 2 x HELM GT wall spacer profile, 15 mm
 - 1 x HELM GT-L pelmet
 - * x HELM GT-L clamping adapter for pelmet
(quantity depends on track length)
 - 1 x HELM GT-L end cap set
 - 2 x HELM GT-L 80 trolley
 - 2 x HELM GT-L fixing bracket for trolley
 - 2 x HELM GT-L door catcher left/right
(when selecting „without damper and soft closing device“)
 - or
 - 1 x HELM GT-L 80 damper and soft closing device with release bolt,
 - 2 x HELM GT-L door catcher left/right
(when selecting „damper and soft closing device on one side“)
 - 1 x HELM four-sided sealing system (bottom guide included)

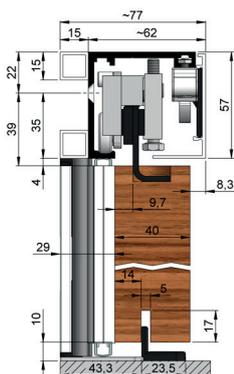

Finish	Number of leaves	Damper and soft closing device	Track length	Article no.
aluminium, silver anodised	1	without	measure length	GT.L80.H.496.41.1.00.9999
		on one side	measure length	GT.L80.H.496.41.1.05.9999
aluminium, stainless steel effect anodised	1	without	measure length	GT.L80.H.496.35.1.00.9999
		on one side	measure length	GT.L80.H.496.35.1.05.9999



Configure product online



Download inquiry form



Download installation instructions

HELM Tight-sealing sliding door systems

Reliably sealed yet exceptionally smooth-running – for superior comfort and protection

Artikel

HELM GT-L 80 G 496


**Tight-sealing sliding door system for leaves up to 80 kg,
wall installation with 9 mm spacer profile and pelmet**



- for interior sliding doors made of tempered safety glass (TSG) and laminated safety glass (LSG)
- sealing system:
 - effective against sound, draughts and odours
 - sealed to the wall with a magnetic sealing system
 - no door frame or stop casing required
 - can be operated easily due to low opening forces
- trolleys: height-adjustable even after installation, with load-bearing rocker for a long service life

Leaf weight: max. 80 kg
 Leaf thickness: 8/8,76 and 10/10,76 mm TSG/LSG
 Leaf width: min. 625 mm
 max. 2.000 mm

- Set contents:
- 1 x HELM GT-L track for wall installation
 - 2 x HELM GT wall spacer profile, 9 mm
 - 1 x HELM GT-L pelmet
 - * x HELM GT-L clamping adapter for pelmet
(quantity depends on track length)
 - 1 x HELM GT-L end cap set
 - 2 x HELM GT-L 80 trolley
 - 2 x HELM GT-L door catcher left/right
(when selecting „without damper and soft closing device“)
 - or
 - 1 x HELM GT-L 80 damper and soft closing device with release bolt,
 - 2 x HELM GT-L door catcher left/right
(when selecting „damper and soft closing device on one side“)
 - 1 x HELM four-sided sealing system (bottom guide included)

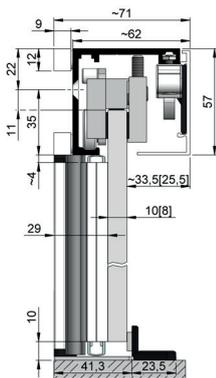

Finish	Number of leaves	Damper and soft closing device	Track length	Article no.
aluminium, silver anodised	1	without	measure length	GT.L80.G.496.41.1.00.9999
		on one side	measure length	GT.L80.G.496.41.1.05.9999
aluminium, stainless steel effect anodised	1	without	measure length	GT.L80.G.496.35.1.00.9999
		on one side	measure length	GT.L80.G.496.35.1.05.9999



Configure
product online



Download
inquiry form



Download
installation
instructions