



KNIPEX[®]

KNIPEX QUALITY – MADE IN GERMANY

For solid, multi-stranded and finely stranded conductors with plastic or rubber insulation, also for ribbon cables up to 10 mm wide


**FROM JUNE
2025**

12 40 200

KNIPEX EvoStrip

**NOW EVEN BETTER: FASTER, MORE PRECISE AND
MORE CONVENIENT AUTOMATIC STRIPPING**

- **Particularly easy stripping in the large capacity range** from 0.03 to 10 mm² cuts cables up to 10 mm²
- **No damage to the conductors** due to automatic adaptation to different conductor cross-sections
- ▶ With its **two-component** handle and comfortable handle width, it sits comfortably in the hand and the ingenious handle design minimizes the risk of hand injuries



High-quality, wear-resistant stripping blades and glass fibre reinforced plastic ensure long-lasting performance. Blades can be replaced quickly and cost-effectively when worn




Top-mounted cable cutter for copper and aluminium conductors offers maximum visibility: Embossed, visible and tangible arrow always shows the exact cutting position, clean cuts due to optimised cutting edge geometry for finely stranded conductors up to 10 mm², solid conductors up to 6 mm²



Versatile application due to generous stripping range of 5–22 mm and up to 25 mm without length stop




Raised, non-slip handle collar in front of the cable cutter provides reliable grip

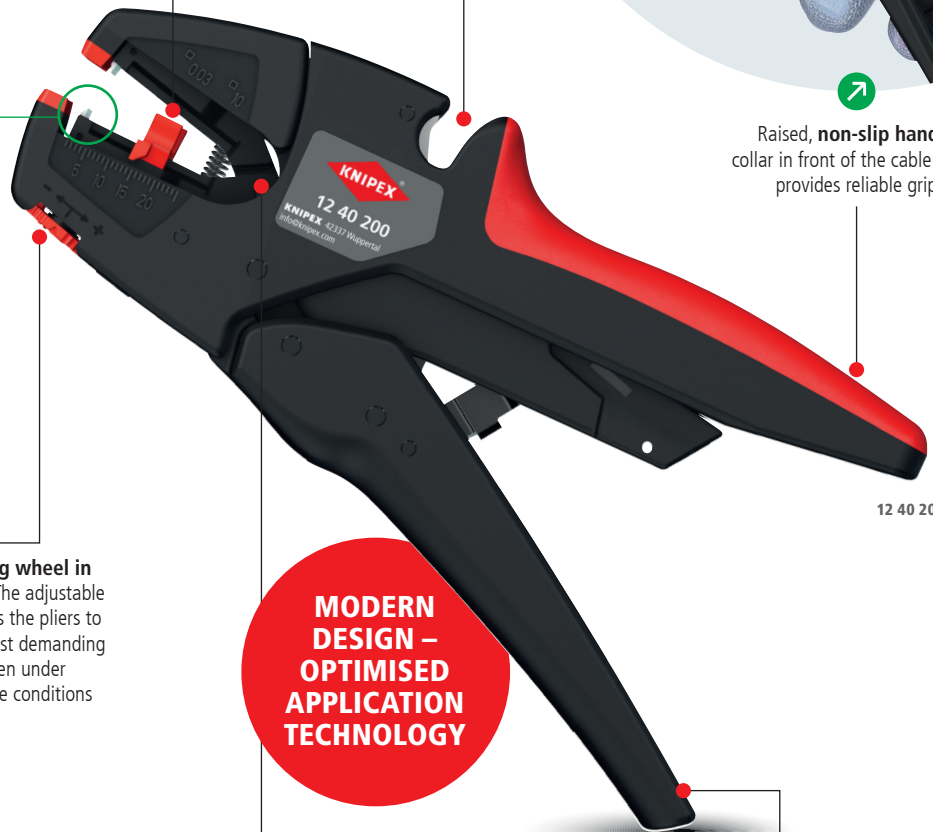

12 40 200

MODERN DESIGN – OPTIMISED APPLICATION TECHNOLOGY



Adjustable setting wheel in fine increments: The adjustable cutting depth allows the pliers to master even the most demanding insulation jobs – even under extreme temperature conditions

Smooth-running mechanism guarantees long-term performance, comfortable working due to low noise levels



With integrated tether attachment point in the handle: For reliable tool protection when working at height, ANSI-compliant and compatible with KNIPEX Tethered Tools tethering system

Article No.	EAN 4003773-	↔ mm	Stripping capacities mm ²	AWG	g
➤ 12 40 200	026662	200	0.03–10.0	32–8	150
➤ 12 49 01	026679	1 pair of spare blades for 12 40 200			
12 49 23	057604	Spare length stop for 12 40 200			
12 49 04	053071	Torsion spring for 12 40 200			
12 49 05	053088	Coil spring in the head for 12 40 200			